
INUA 7240

72" x 40" x 23"

Slim deck 1/2"

In Inuit spirituality Inua means "everything that lives." INUA is the universal soul that unites all things in nature.

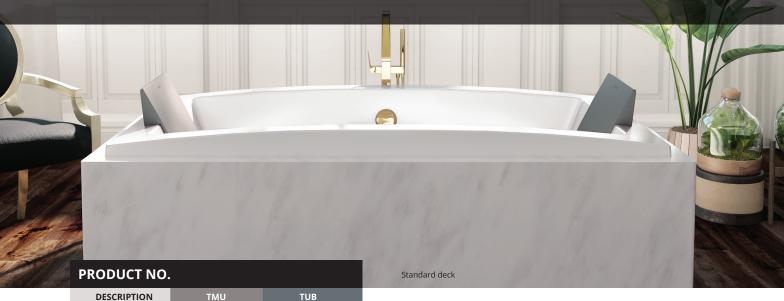

DESCRIPTION	тми	TUB	
Standard 1 1/2" deck	BINURD00T-XX	BINURD00N-XX	

BINURD10T-XX

BINURD10N-XX

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$
Jets	5
1 heated backrest	Include
MiaPlus® Control	Include
Geysair®	Include
AromaCloud® BAROMAC	\$
Illuzio Chromatherapy BCHRO6	\$
2 nd heated backrest (WTS-1 zone) BSHB	\$

TUB Soaker	\$
AromaCloud® BAROMAC	\$
Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control	Included with therapy
2 nd WarmTouchShell® BWTS2	\$

FEATURES				
Installation type				Drop-in
No. of bathers	* *	Inverted V		2
US gallons	67	Armrests		4
Imp. gallons	56	Grab bars (color match)		2
Raised seats	2	Comfort Cushion (specify color: Gray or Black)		2
STANDARD COLOR				

OPTIONS (UPCHARGE APPLICABLE)			
COLOR			
Gray 05		\$	
FINISH			
UltraVelour Matte Finish (White only) BVEL		\$	
WASTE & OVERFLOW	16" x 35" BOVER16-XX	INTE- GRATE BOVERIN	D
Chrome 07	\$	\$	
White 01, Biscuit 02	\$	\$	
Brushed Nickel 09, Polished Nickel 10	\$	\$	
Oil-rubbed Bronze 11	\$	N	//
Black Chrome 12, Matte Black 19, Satin Brass 18	N/A	\$	
CONTROL (TMU only)			
MiaMulti® BMIAM2-XX		\$	
CLEAR ACRYLIC GRAB BARS BGBG10-XX			
With Chrome 07 or Brushed Nickel 09 inserts		\$	
IF REQUIRED BY CONSTRUCTION CODE OR	INSTALLED	WITH ITC)
Brass waste & overflow kit* BDRCOB		\$	
Brass waste kit* BDRCB		\$	
16" x 35" Cable driven Brass waste & overflow kit BOVERBR-XX		\$	

Don't forget to specify the deck height (1/2" or 1 1/2"). * When ordered with integrated waste & overflow.

TOTAL PRICE

White 01

Biscuit 02

Included









INUA 7240

INSTALLATION

(A) With the AromaCloud®, you must choose to install the control or the faucet on opposite side.





LETTER	DESCRIPTION	MEASURE
Α	Outside edge to center drain	20"
В	Outside edge to overflow	4 1/2"
С	Total length	72"
D	Total width	40"
E	Bathing well length	49 1/8"
F	Bathing well width at foot area	25 1/8"
G	Raised seat length	17 1/8"
Н	Deck width at backrest end	4 5/8"
I	Deck width	4 5/8"
J	Deck width	4 5/8"
К	Height from bottom of tub to top deck	23"
L	Total height to headrest	21"
М	Height from bottom of tub to bottom of lip (std deck)	19 1/2"
M'	Height from bottom of tub to bottom of lip (slim deck)	20 1/2"
N	Height from drain to center of overflow	17 1/8"
0	Maximum water level	15 3/8"
P	Slope of backrest	24°
Q	Minimum spout reach	8 3/4"
R	Slim deck minimum height	1/2"
S	Standard deck minimum height	1 1/2"

- ⚠ AromaCloud® position
- Control position when factory-installed (Mia® or DOT)
- Turbine position (TMU)
- Indicates heated backrest (TMU)
- Indicates WarmTouchShell® position (TUB)

Hot water supply required	Should be 70% of water capacity of TUB or greater.	
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.	
Therapeutic Comfort Cushion	Made of ultraresistant urethane gel Extremely comfortable and soft to the touch Fully waterproof Remarkably durable Color available: Gray + Black	

Approx. shipping weight	153 lbs
Turbine power	550 W
Air heater	600 W
WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

 $[\]mbox{*}$ Some restrictions apply | www.bainultra.com/warranty





The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.