**ADA** 

**CSA B651** 

## **FEATURES**

- Solid metal construction for durability and reliability
- Two-handle, widespread lavatory faucet for 8" (203 mm) 16" (406 mm) centers
- Quarter-turn washerless ceramic disc valves
- 1.2 gal/min (4.5 l/min) maximum flow rate
- Includes Soft Touch drain
- Thin, slender form
- Meets CalGreen requirements for bathroom sink faucets
- Complements the Per Se collection

## CODES/STANDARDS APPLICABLE


P24736

**OBC** 

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- ADA\*
- CSA B651\*
- OBC\*
- NSF 61

\*Compliant when installed to the specific requirement of this regulation

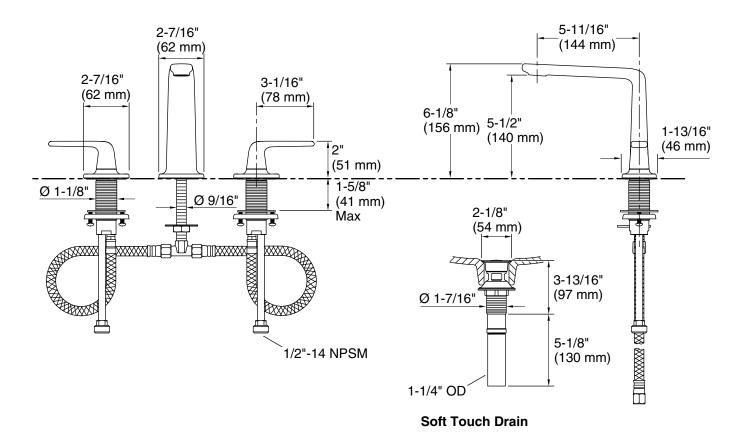

INSTALLATION NOTES							
Mounting surface hole size. All dimensions are nominal.							
Spout	Ø 5/8" (16 mm)						
Handles	Ø 1-5/16" (33 mm)						
Deck Thickness	Min	Max					
Spout		2-1/2" (64 mm)					
Handles		1-5/8" (41 mm)					

SPECIFIED MODEL							
Model	Description	Finishes					
P24736-LV	Per Se Basin Set, Tall Spout, Lever Handles	CP Polished Chrome	AD Nickel Silver	AG Brushed Nickel	☐ W7 Black Nickel	24K Polished Gold	

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.