



On Sale

CUBE COLLECTION

Design Wetstyle Design Lab







FEATURES

Handcrafted in Montreal, Canada

Integrated overflow


Soft toe touch drain

Plug & Bathe drain connection for quick install

Wood bridge in Wenge shade included


TECHNICAL DETAILS


- Width: 40"
- Length: 72"
- Height: 24"
- Weight: 221 lbs / 100 kg

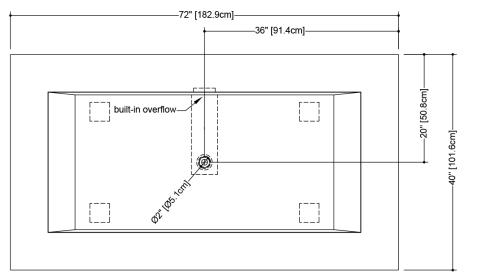

WETSTYLE Plug & Bathe™ overflow and drain connection system includes: Soft-touch pop-up drain, for built-in overflow. Fits both 1-1/2" ABS drain waste and 1-1/2" tubular brass 1-1/2" ABS Direct vertical drain waste fitting (copper/brass option also available) 1-1/2" ABS 90° Elbow drain waste fitting (copper/brass option also available)

plan view

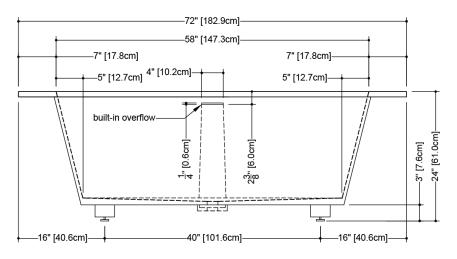




front view

BC 05

WETSTYLE cannot be held responsible for any technical errors and reserves the right to make revisions without notice. Approximate measurement. The manufacturer accepts ¹/₄" (6.35mm) variance.



AVAILABLE CONFIGURATIONS



BC0501 - Drop-in

•

BC0502 - Drop-in -

Back Wall




BC0504 - Drop-in -Left and Back Walls

BC0505 - Drop-in -

Right and Back Walls

• White Matte (#MA)

• White True High Gloss (#GA)



BC0506 - Drop-in -Three Wall Alcove

OPTIONS

Model

- BC0501 Drop-in
- BC0502 Drop-in Back Wall
- BC0504 Drop-in Left and Back Walls
- BC0505 Drop-in Right and Back Walls
- BC0506 Drop-in Three Wall Alcove

Drain Overflow Trim Finish

- Brushed Nickel Drain No Trim Overflow (#BNNT)
- Brushed Nickel Drain and Overflow (#BN)
- Matte Black Drain No Trim Overflow (#MBNT)
- Matte Black Drain and Overflow (#MB)
- Polished Chrome Drain No Trim Overflow (#PCNT)
- Polished Chrome Drain and Overflow (#PC)
- Satin Brass Drain No Trim Overflow (#SBNT)
- Satin Brass Drain and Overflow (#SB)

CODES/STANDARDS APPLICABLES

IAPMO-ANSI Z124.1 IAPMO-ANSI Z124.3 CSA B 45.0 CSA B 45.4 Mass Board Approved

Plumbing Connection

WETMAR BiO Finish

- Copper/Brass Connection local code dependant (#COP)
- Standard ABS Connection



NOTES

IMPORTANT - BATHTUB INSTALLATION SUPPLIES: A 1/4" tile flange will be supplied to comply with the requested position. Installed at the factory to prevent water leakage, this must be placed directly on the partition framing prior to the installation of drywall.