

blu·stone™ freestanding bathtub


Installation Guide



BT0102
BT0104
BT0105




BT0305




BT0110L
BT0110R




BT0305N15
BT0305N17




BT0203
BT0207




BT0402




BT0402N16



BT0402N17

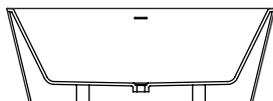

BT0304

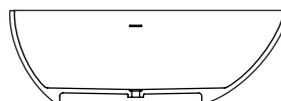

BT0406
BT0408



BT0304N17

Attention — Before Installation

Thank you for choosing from among Blu's quality line of products. We recommend that you carefully read this installation guide to ensure your bathtub's proper operation and reliability for many years to come.

WARNING: This bathtub is made of a quartzite stone and resin. The tub's weight may vary between 300 and 440 lbs (140 and 200 kg). We recommend that the installation be done by a minimum of 2 people as a security precaution. Also make sure to adopt the proper posture when lifting the tub.

Adhere to all local building and plumbing codes. The diagrams in this guide are not construction plans. They are visual aids.

Installation Requirements

Please read the instructions carefully so as to avoid any damage to the fixture.

1. To ensure this product is installed properly, you must read and follow these guidelines.
2. The owner/user of the product must keep this information for future reference.
3. Consult local building codes to make sure the installation complies with standards.
4. Remove the unit from its packaging. Before disposing of it, inspect the unit to make sure its in good shape. Should inspection reveal any damage or defect in the finish, contact your distributor. The warranty does not cover damages or defects in the finish once it has been installed. Blu Bathworks' responsibility for shipping damages ceases upon delivery of the product in good order to the carrier. All complaints regarding damage due to transport must be made directly to the carrier.
5. Place the unit in the bathroom before you start working. Conserve all nuts and bolts.
6. To protect the unit during installation, we recommend that you lay a piece of cardboard on the bottom.
7. If the unit is covered with polyethylene protective film, do not remove until installation is complete to grant maximum protection. However, remove film where any two surfaces will be in permanent contact.
8. Make sure the bathroom floor is level and strong enough to support the weight of the water-filled bathtub. If you are renovating, bring down the walls to install framing and plumbing. Make sure the walls are properly insulated and comply with the appropriate building code.
9. Verify that all dimensions on the plan are the same as the ones of the unit.
10. If an apron is to be installed, make sure the bathtub is at the same height as the floor covering.

Installation Notes

Important! Install this product according to the installation guide. Floor support under bath must provide for a minimum of 1600 lbs (725kg). Hot water supply should be 70% of capacity or greater. Installation will vary.

Technical Support Assistance

If further assistance is required, please contact:

Product Support at 1.866.907.0122 (09:00 – 17:00hrs PST) or email technical@blubathworks.com

North America

Blu Bathworks Inc.

188 Smithe Street, Vancouver, BC, Canada, V6B 6A9

T +1.604.299.0122 F +1.604.299.0125

Please refer to blubathworks.com for warranty, terms & conditions under warranty & procedure for warranty service.

General Instruction before Installation

IMPORTANT: Ensure to check the bathtub for proper drainage before any draining is done.

- The bathtub is shipped with the waste and matching blu-stone™ drain cover.
- Blu recommends that the tub be water tested before installation is complete. Fill the tub to overflow and inspect for leaks.
- Decide exactly where you wish to install the bathtub and place the tub where it is to be installed and ensure the tub is level.
Note: Use 1½" (FIP) adaptor.
- Install the basic plumbing components: water inlet and waste. These tub models require a vertical plumbing connection from the floor.
- Shims may be required to level the tub depending on finish floor surfaces. Shims are not included. When adjusting the level allow a slight clearance (1/8") between the finished floor and the apron. **Note:** use a level to ensure accuracy.
- Connect the bathtub drain to the waste. Hook up the water to the faucet. Check that all connections are waterproof.

NOTE: The faucet cannot be installed on the bathtub. The tub filler must be mounted either in the wall or a freestanding floor-mounted tubfiller. Read the manufacturer's instructions for installation details.



Installation Instructions

PREPARATION

- Clean, level, and prepare the floor for installation.
- Place the unit in the exact installed position on the floor and trace the outline of the bath with a pencil or any erasable marking. (Fig. 1)
- Determine the location of the drain pipe on the floor by taking measurements of the drain and waste location underneath the unit. (Fig. 2)

Note: Drain and waste locations will vary by model.



- Using a blanket, cardboard, or other clean protective surface, turn the unit on its side so that the unit is properly supported during drain installation.
- Clean the drain hole area in preparation of setting the drain. The area should be dry and free of any debris.

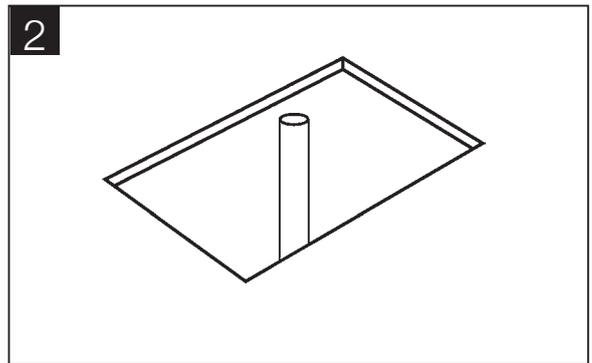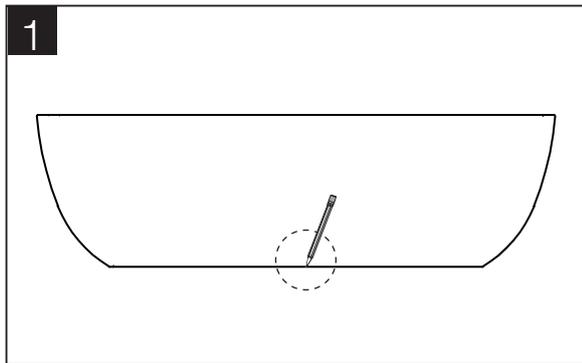


INSTALL DRAIN HARDWARE

- Apply a bead of clear silicone around the drain body and pass it through the drain hole. (Fig. 3)
- Apply silicone over the bottom of the drain body. (Fig. 4)
- Attach the drain body nut on the drain body and tighten until the nut and washer have created a seal with the bottom of the bathtub.

* DO NOT overtighten

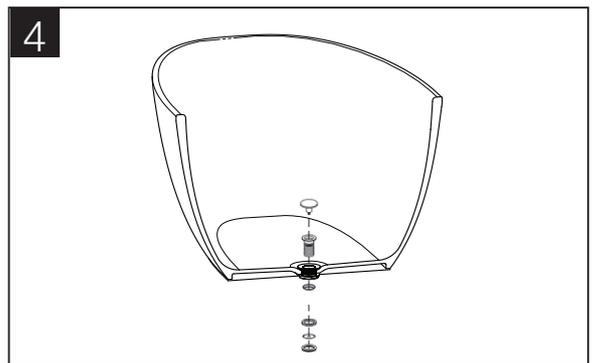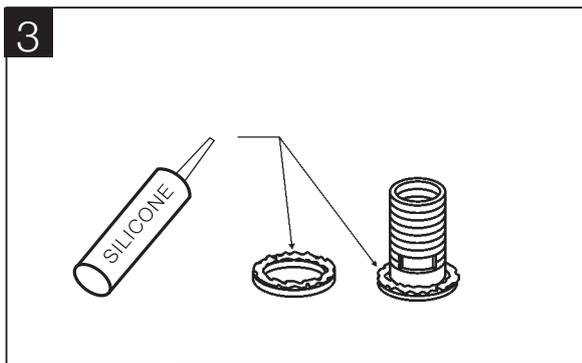

- wear protection



- two people recommended


PREPARE THE TAIL PIECE

All parts involved in tail piece installation are provided by the installer (Fig. 5).

- Waste drain must always be installed according to local standard. Verify the placement of the bathtub before drilling the hole for the waste drain.
- Install 1 1/2" rubber slip gasket over the waste drain.
- Alternatively, Blu Bathworks recommends BTWaste.RN Island Tub Drain*** for easy installation of freestanding bathtubs. (Provided by customer)
- Cut tail piece to desired length (will vary for each installation)
- Slide tail piece nut over tail piece towards flanged end.
- Place flange washer on top of tail piece.
- Connect tail piece assembly to waste drain.




Island Tub Drain Installation ***

Refer to BTWaste.RN Installation Guide

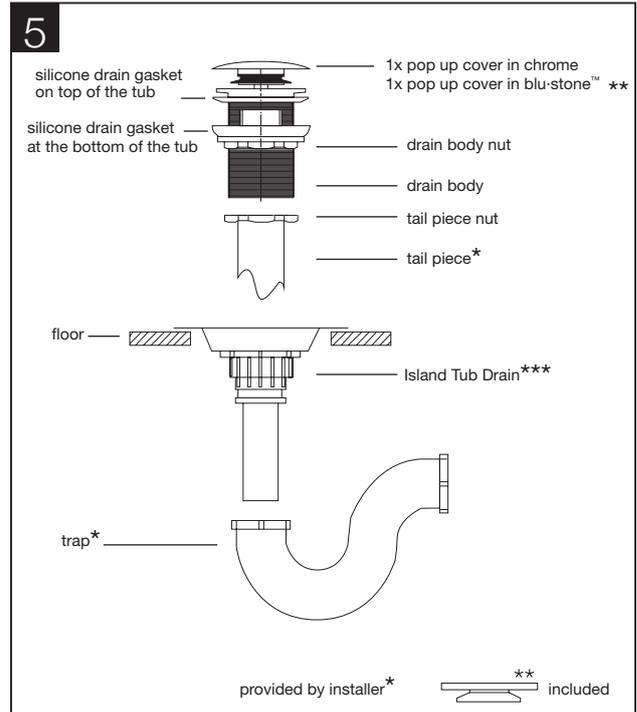



INSTALL BATHTUB

- Apply a generous bead of adhesive or silicone to the bottom of the tub supports. (Fig. 6)
- Apply a bead of tub and tile caulk around the edge of the base. (Fig. 6)
- Carefully set tub into position (Fig. 7) and connect the drain hardware (previously installed).
Finish the installation of the tail piece.

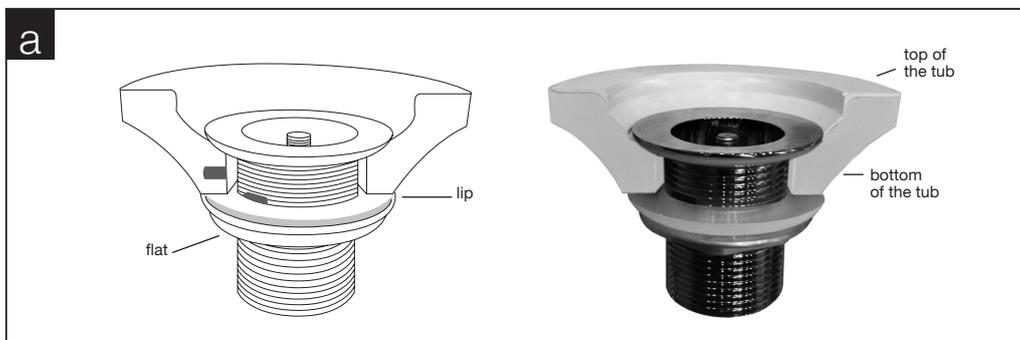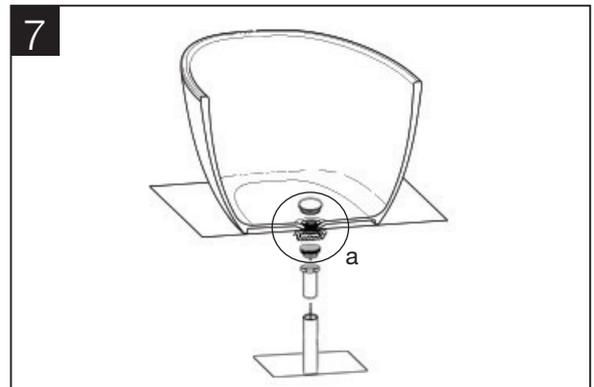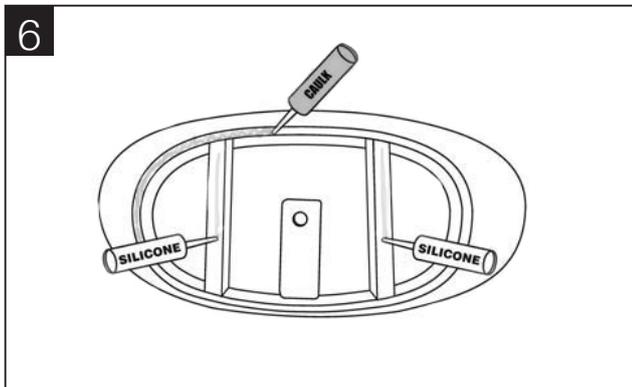

COMPLETE INSTALLATION

- Fill the tub with water to the overflow and then drain the tub while inspecting the waste connections below the floor for leaks. Access from below will be necessary for this step (Fig. 8).
- With the bathtub now in place, wipe off any excess tub and tile caulk and adhesive where the tub meets the floor.
- Run a bead of tub and tile caulk around the bottom edge of the bathtub where it meets the floor. Wipe off any excess caulk with a wet cloth (Fig. 9).

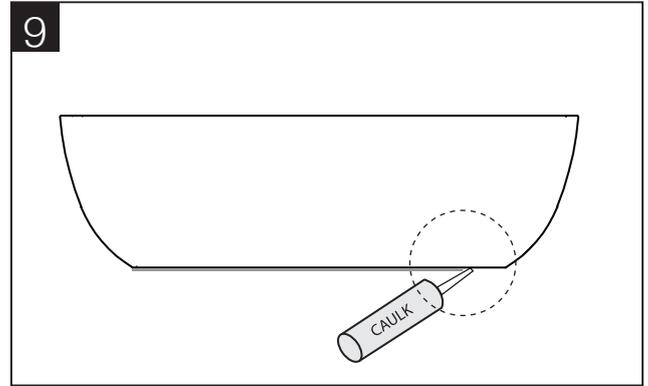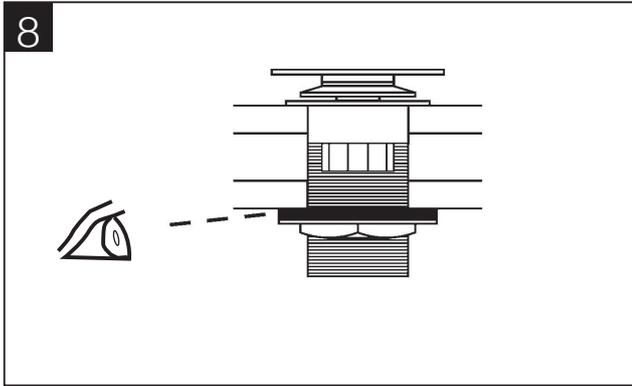

Note: This installation is recommended by Blu Bathworks. Our products must be installed by certified professionals only and according to our install recommendations as well as federal, provincial / state and local building codes and regulations.



ALCOVE INSTALLATION USING TILE FLANGE

BT0102 · BT0104 · BT0105 · BT0203 · BT0207

In order to maintain the symmetry of these narrow rim tub models in an alcove installation, the following points & illustration are provided below.


1. Determine wall finish material and its thickness
2. Install tile flange on corner edge of bathtub using high density silicone above and below lip of TF.BTTSB tile flange as shown in Detail I (exploded)
3. Install bathtub
4. Install wall finish
5. Apply a clear silicone bead where the tub and wall finish meet at the flange location

**Blu Bathworks recommends TF.BTTSB Tile Flange (Sold separately)

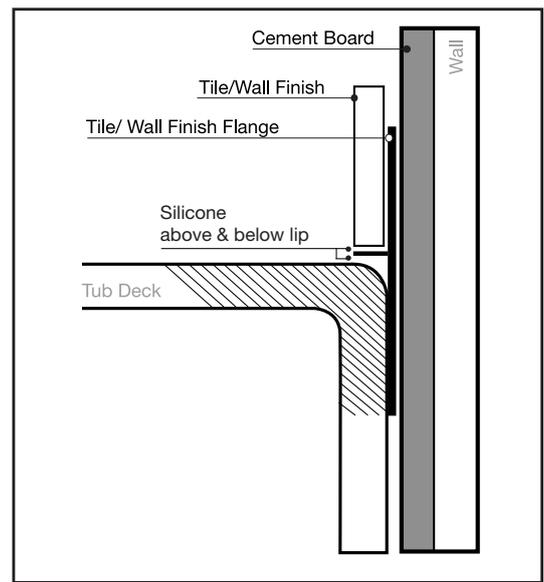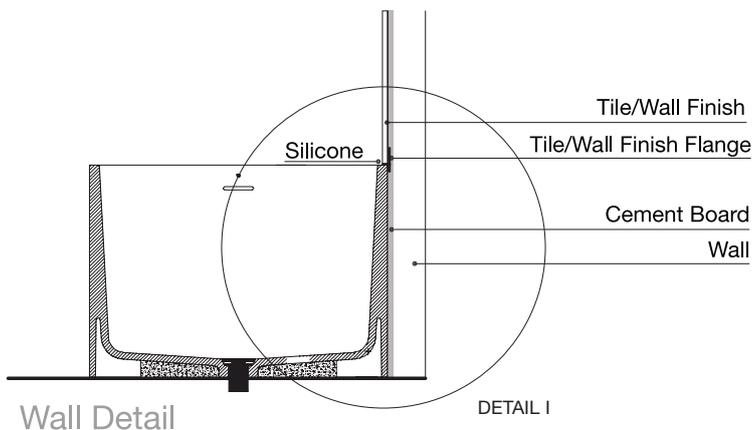


ALCOVE INSTALLATION EXAMPLES
BT0102 · BT0104 · BT0105


PENINSULAR

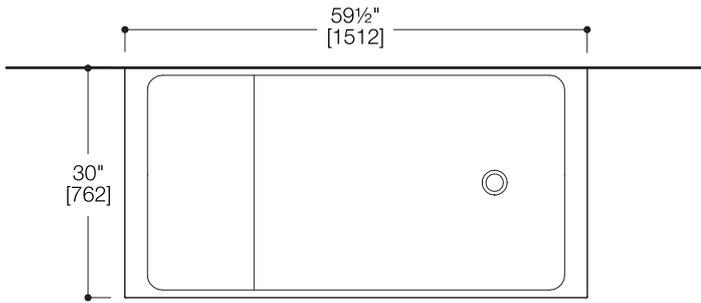


ALCOVE
(only BT0110L/R)

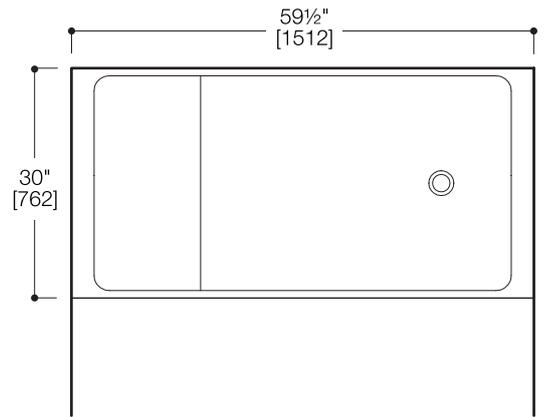

LEFT CORNER

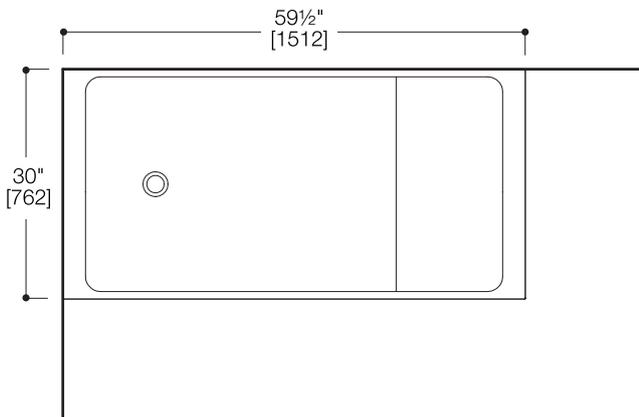

RIGHT CORNER

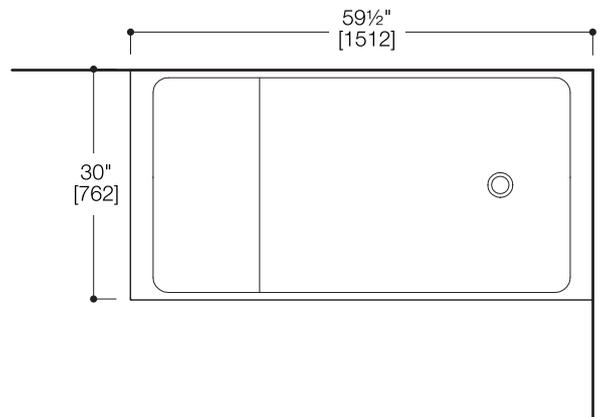

blu·stone™ cleaning & repair guide

blu·stone™ is Blu Bathworks' signature eco-friendly stone collection; a durable, low maintenance and hygienic material that is high pressure injection molded, non-porous and anti-microbial. blu·stone™ products are stain, scratch and impact resistant, and easy to clean: after each use, simply wipe with a soft cloth to remove any surface dirt.

routine care

- Never expose blu·stone™ to petroleum based products, such as paint removers, oven cleaners or other solvents
(**Note:** personal hygiene products and cosmetics will NOT damage the surface)
- We recommend that stains are removed within 24 hours
- Do not directly cut on the blu·stone™ surface
- Blu Bathworks does not recommend exceeding US/ Canada maximum hot water temperature regulations of 150°F/65°C, respectively. Exceeding stated temperatures could result in damage to blu·stone™ products

standard cleaning

For standard cleaning of both gloss and matte finishes, we recommend using widely available cleaning products such as Mr. Clean, Fantastik, VIM, CIF etc. Matte finished products may occasionally require a mildly abrasive product.

blu·stone™ matte finish:

- For more difficult stains, use a mildly abrasive cream cleanser such as Soft Scrub, Comet Soft Cleanser, CIF or VIM

blu·stone™ gloss finish:

- Do not use abrasive products or cream cleansers

scratched or damaged surfaces

blu·stone™ matte finish:

- Ensure there is no surface dirt by flushing with water
- Rub the 600-grit sanding block, provided, in a gentle circular motion
- Higher grit sandpaper may be required to blend the repaired area to match the existing product finish

blu·stone™ gloss finish:

- Ensure there is no surface dirt by flushing with water
- We recommend sanding the area starting with 600, 800 and 1200-grit sandpaper: begin with the lower number (coarser) grit followed with each higher number (finer) in ascending order
- Finish by polishing the surface using a cloth and white polishing compound for automobiles

repairs


For more extensive repairs, send a photograph of your blu·stone™ product to Blu Customer Service (technical@blubathworks.com), who will inform you as to the most appropriate methods to use.

limited warranty


Blu Bathworks' ("Blu") warranty on blu·stone™ products covers all defects in materials and manufacturing for a period of five (5) years from the date of purchase. This limited warranty, starting on the original purchase date, is only offered to the original purchaser who acquires the product directly from Blu or from its authorized dealers. This limited warranty does not apply to cases in which a product was incorrectly installed, nor to damage due to negligence, misuse, thermal shocks, cigarettes, flames, natural catastrophes or other accidents. Blu is not responsible for costs and claims that may arise from purchase of a product unsuited to the structure of the existing building. Any transformation or alteration made to a Blu product automatically voids the warranty. Blu's warranty is limited to repair or replacement (with a product of equal value), provided the claim is made to an authorized dealer or directly to Blu, within the warranty period. Labor costs and any other expenses entailed by replacement of a Blu product are not covered by the warranty.

Acrylic Freestanding Bathtub

Installation Guide




BT8001




BT8002B16

BT8002B18



BT8005




BT8004B16

BT8004B18



BT8007

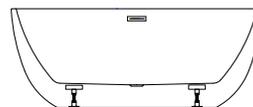

BT8006B15

BT8006B17

Attention — Before Installation

Thank you for choosing from among Blu's quality line of products. We recommend that you carefully read this installation guide to ensure your bathtub's proper operation and reliability for many years to come.

WARNING: The tub's weight may vary between 120 and 250 lbs (55 and 115 kg). We recommend that the installation be done by a minimum of 2 people as a security precaution. Also make sure to adopt the proper posture when lifting the tub.

Adhere to all local building and plumbing codes. The diagrams in this guide are not construction plans. They are visual aids.

Installation Requirements

Please read the instructions carefully so as to avoid any damage to the fixture.

1. To ensure this product is installed properly, you must read and follow these guidelines.
2. The owner/user of the product must keep this information for future reference.
3. Consult local building codes to make sure the installation complies with standards.
4. Remove the unit from its packaging. Before disposing of it, inspect the unit to make sure its in good shape. Should inspection reveal any damage or defect in the finish, contact your distributor. The warranty does not cover damages or defects in the finish once it has been installed. Blu Bathworks' responsibility for shipping damages ceases upon delivery of the product in good order to the carrier. All complaints regarding damage due to transport must be made directly to the carrier.
5. Place the unit in the bathroom before you start working. Conserve all nuts and bolts.
6. To protect the unit during installation, we recommend that you lay a piece of cardboard on the bottom.
7. If the unit is covered with polyethylene protective film, do not remove until installation is complete to grant maximum protection. However, remove film where any two surfaces will be in permanent contact.
8. Make sure the bathroom floor is level and strong enough to support the weight of the water-filled bathtub. If you are renovating, bring down the walls to install framing and plumbing. Make sure the walls are properly insulated and comply with the appropriate building code.
9. Verify that all dimensions on the plan are the same as the ones of the unit.
10. If an apron is to be installed, make sure the bathtub is at the same height as the floor covering.

Installation Notes

Important! Install this product according to the installation guide. Floor support under bath must provide for a minimum of 1400 lbs (635kg). Hot water supply should be 70% of capacity or greater. Installation will vary.

Technical Support Assistance

If further assistance is required, please contact:

Product Support at 1.866.907.0122 (09:00 – 17:00hrs PST) or email technical@blubathworks.com

North America

Blu Bathworks Inc.

188 Smithe Street, Vancouver, BC, Canada, V6B 6A9

T +1.604.299.0122 F +1.604.299.0125

Please refer to blubathworks.com for warranty, terms & conditions under warranty & procedure for warranty service.

Installation for Freestanding Bathtubs

IMPORTANT: Ensure to check the bathtub for proper drainage before any draining is done.


- The bathtub is shipped with the skirt attached as one piece.
- Blu recommends that the tub be water tested before installation is complete. Fill the tub to require the overflow and inspect for leaks.

NOTE: Blu recommends that acrylic tubs be anchored to the floor using either floor cleats or adhesive.

Installation Using Floor Cleats

(Included with all Blu acrylic bathtub models)

1. Mark the outline of the bathtub on the floor with nonpermanent marker.
2. Turn the bathtub upside down. This is a 2 person task and the floor must be protected by a clean, padded material to ensure that the bathtub is not scratched or damaged through contact with the floor.
3. Measure the location of the feet and transfer measurement to the floor.
4. The floor finish will determine the type of screw to adhere the cleats to the finished floor.
5. As per diagram 1, offset cleats, mount cleats open in the opposite direction.

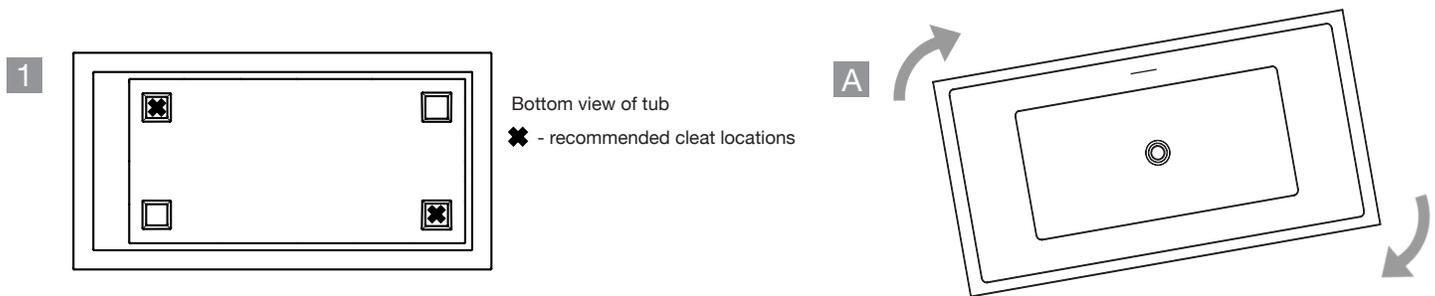


6. Using 2 people, turn the bathtub the right way up, center the bathtub on the outline marked on the floor in the previous steps, and press down firmly.
7. As per diagram A, offset the tub from center to allow the tub to enter the open cleat when slid into position. Then rotate clockwise into position.
8. Connect the bathtub drain to the waste. Hook up the water to the faucet. Check that all connections are tested and not leaking water.
9. The waste and overflow can then be attached to the trap from below the floor.

Installation Procedure


Before you start:

- Ensure that the floor is level and the strength of the floor is sufficient where the bathtub will be positioned.
- Clean the space around where the bathtub will be positioned to avoid damage to the bathtub during installation.
- The waste-overflow fitting is supplied with the product, however other accessories like the tail piece and adaptors are not included and must be purchased separately from your local supplier.
- The bathtub must be carried in the upside-down position. Do not lift or support the bathtub by the panels.
- Raise the bathtub up to 3½" with 4x4 pieces of lumber so you can have access from the bottom of the bathtub.
- The basic installation of plumbing pipes (drain & water supply) must be performed by a qualified plumber.
- The waste-overflow fitting comes pre-installed with the bathtub from the factory. The waste pipe/p-trap connection must be made directly to waste/drain outlet located underneath the bottom of the tub.


Installation Sequence

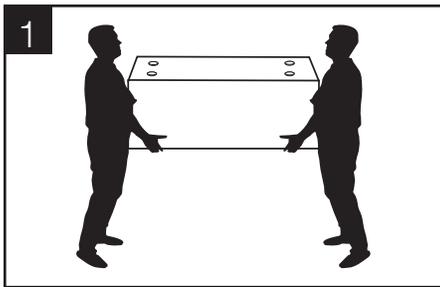

- The acrylic bathtub must be carried in an upside-down position. It must never be carried by its acrylic panels. Two persons required.

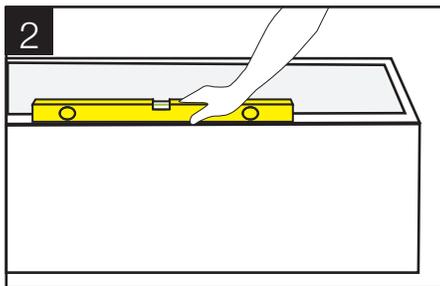


- The bathtub is leveled via a water level at the intended local installation area.

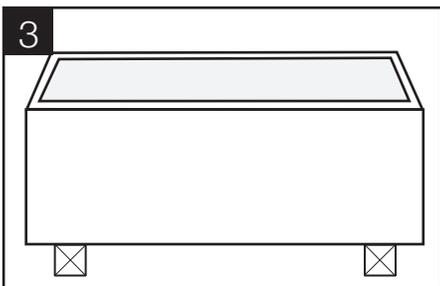


- Raise the bathtub up to 3½" with 4x4 pieces of lumber so you can have access from the bottom of the bathtub.


Installation Sequence (continued)

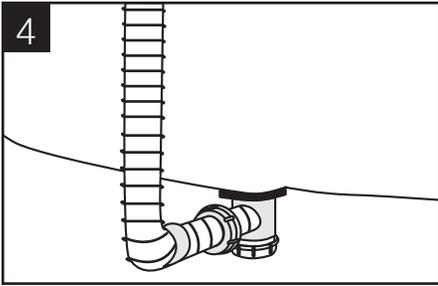


- The water outlet pipe should be connected.
- Connect integrated overflow tube to outlet drain.

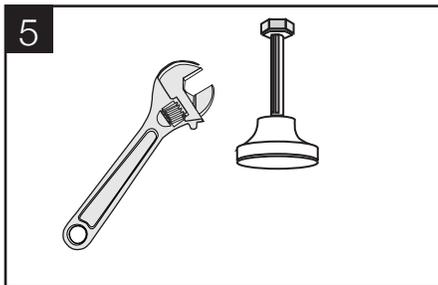


- Level the feet of the tub. Lock the bathtub legs into position by tightening the adjoining nut once an accurate level is confirmed.

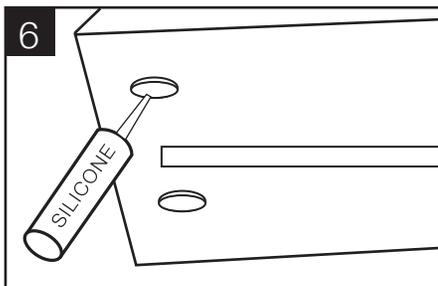

- Apply silicone to the feet of the bathtub that stands on the floor.

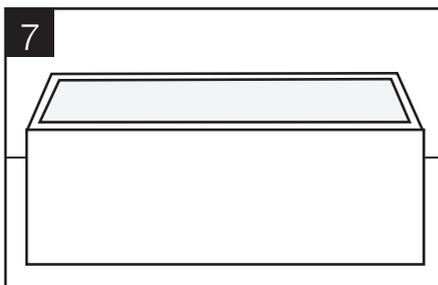



- When the installation is completed, the bathtub is taken down from the supports. (ie 2 x 4x4's)



If necessary, installation is completed by applying silicone at several points between the bottom panel and floor.

Note: any remaining protective packaging should be removed only after the bathtub installation and other construction work in the bathroom is fully finished.

Drain Plumbing Installation

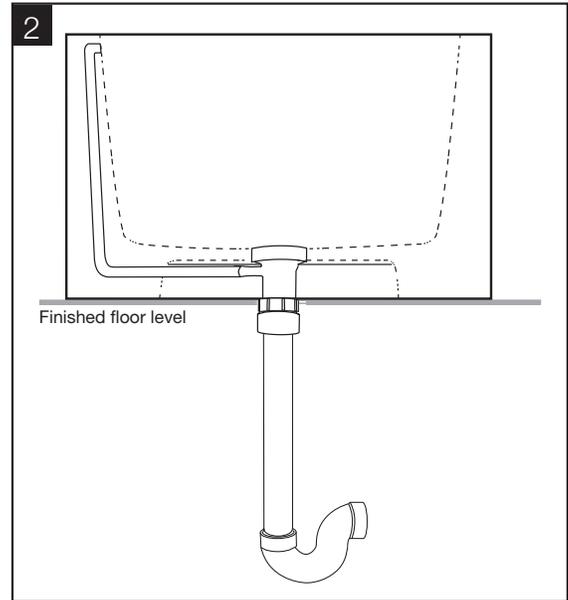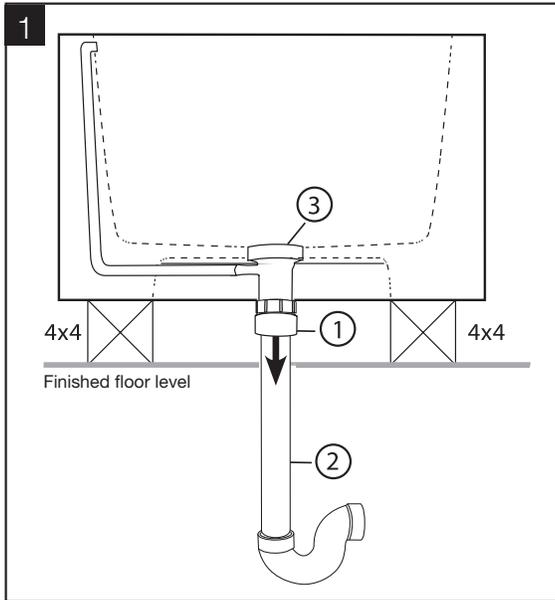

- Place the bathtub by raising it up 3½" with 4x4 pieces of lumber so you can have access from underneath the bottom of the tub. **(fig.1)**
- From the bottom of the bathtub, tighten the rings of the drain (1) to the drain (3) (don't forget to use the seal washer in between).
- Before placing the bathtub, thread on the Female threaded adapter (2). (Not supplied with the bathtub and must be provided by your plumber).
- Ensure alignment of the drain (3) to the expansion joint (1).
- Move the bathtub down slowly by removing the pieces of lumber. **(fig.2)**
- Fill the bathtub with water to test and let drain out.
- From underneath the tub, make sure that all the joints are tested and watertight.
- Fill the spaces with silicone.
- Let bathtub stand for at least 24 hours before use.

Prepare the Tail Piece


All parts involved in tail piece installation are provided by the installer (Fig. A)

Waste drain must always be installed according to local standard. Verify the placement of the bathtub before drilling the hole for the waste drain.

- Install 1½" rubber slip gasket over the waste drain.
- Alternatively, Blu Bathworks recommends BTWaste.RN or BTWasteCI.RN Island Tub Drain for easy installation of freestanding bathtubs. (Provided by installer or customer)
- Cut tail piece to desired length (will vary for each installation)
- Slide tail piece nut over tail piece towards flanged end.
- Place flange washer on top of tail piece.
- Connect tail piece assembly to waste drain.

*** Island Tub Drain Installation

Refer to BTWaste.RN/BTWasteCI.RN Installation Guide

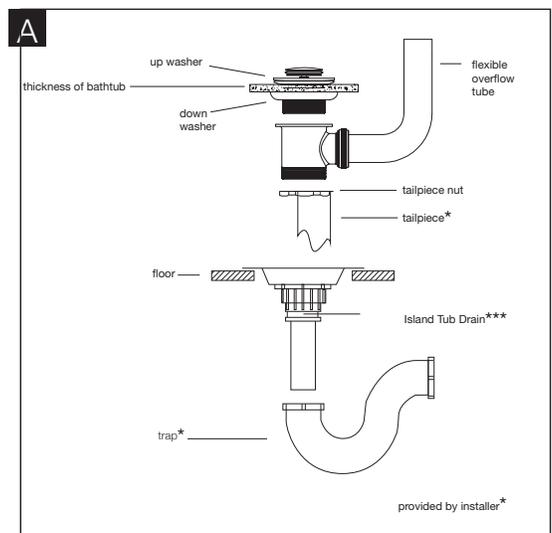



Alcove Installation using Tile Flange

BT8001 · BT8005 · BT8007

In order to maintain the symmetry of these narrow rim tub models in an alcove installation, the following points & illustration are provided below.

1. Determine wall finish material and its thickness
2. Install tile flange on corner edge of bathtub using high density silicone above and below lip of TF.BTSB tile flange as shown in Detail I (exploded)
3. Install bathtub
4. Install wall finish
5. Apply a clear silicone bead where the tub and wall finish meet at the flange location

**Blu Bathworks recommends TF.BTSB Tile Flange (Sold separately)

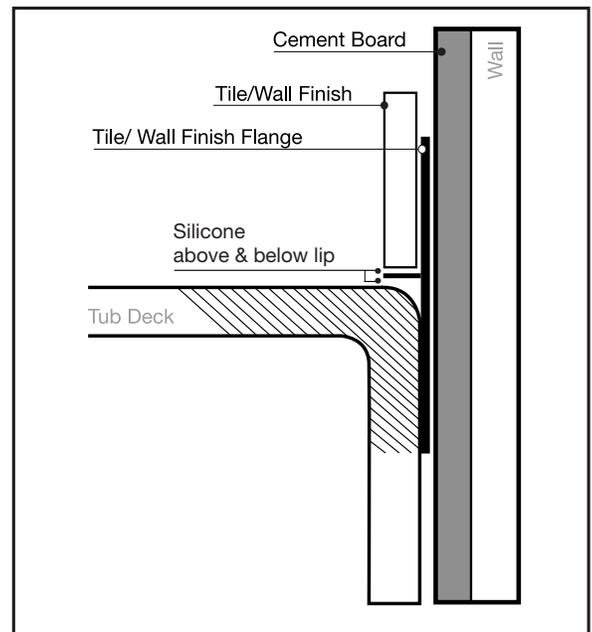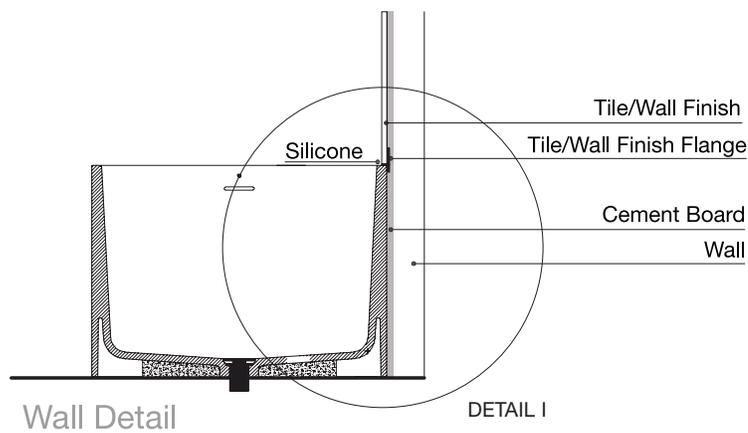

DETAIL I (exploded)


Alcove Installation Examples

BT8001


PENINSULAR




ALCOVE

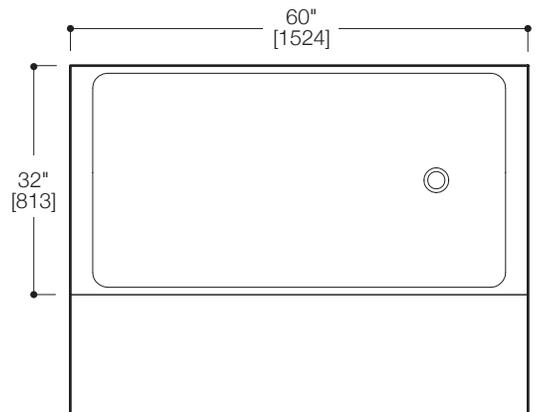


LEFT CORNER

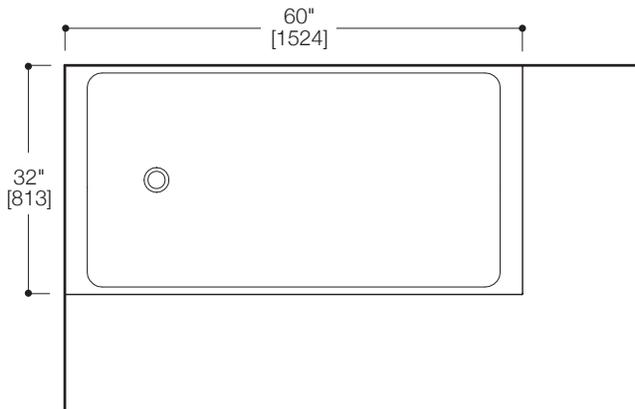


RIGHT CORNER

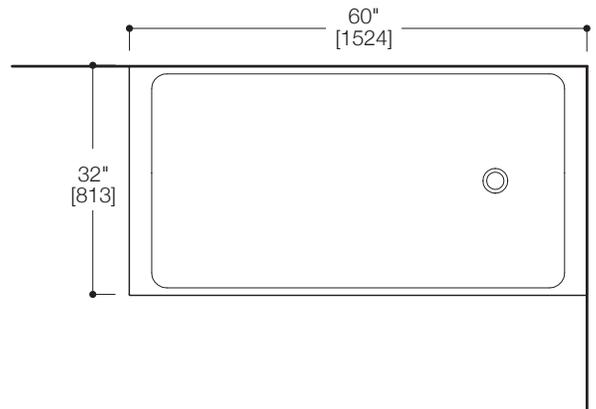




- Waste Drain (provided)



- 1 1/2" Female Adapter*



- 1 1/2" ABS Pipe* (cut to length)

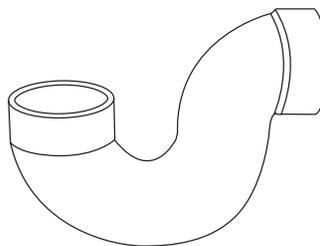

- 1 1/2" ABS Trap*

* Provided by plumber

Acrylic Tub Care and Maintenance

- Acrylic tubs require more frequent washing than other tubs. Once a week is usually appropriate.
- Use plain dishwashing liquid with plenty of hot water.
- Use vinegar. This is great for hard water build-up. Spray a mixture of water and vinegar onto the affected areas and let it sit for 30-45 minutes.
- Scrub the affected areas and then rinse off with warm water. Be sure to use soft sponges.
- You want to avoid abrasive cleaning pads or other products with fine grit.
- Use soft cleaners are the key here, since acrylic is easily scratched.
- Try bathroom cleaning products like Soft Scrub to remove stains from your acrylic tub.
- Avoid pumice stones and scouring pads.
- If the previous steps did not help to enhance the gloss finish, you can use a car polish wax on the area using a soft cloth; spread small amounts over the area in need of refinishing. Remove excess polish and wax with a clean cloth. Allow the wax to dry; repeat as necessary until shine is restored.

blu·stone™ shower bases

Installation Guide



SB8080



SB9090



SB8120



SB9120




SB8150



SB9150



SB8250



SB9250

Attention — Before Installation

Thank you for choosing from among Blu's quality line of products. We recommend that you carefully read this installation guide to ensure your shower base's proper operation and reliability for many years to come.

WARNING: This shower base is made of a quartzite stone and resin. The shower base's weight may vary between 55 and 200 lbs (25 and 90 kg). We recommend that the installation be done by a minimum of 2 people as a security precaution. Also make sure to adopt the proper posture when lifting the shower base.

Adhere to all local building and plumbing codes. The diagrams in this guide are not construction plans. They are visual aids.

Installation Requirements:

1. Observe all of the local hydraulic and building regulations.
2. The following instructions are to be followed by qualified personnel with the technical background and experience needed to manage the product safely.
3. This shower base should only be used in domestic environments at room temperature.
4. The Manufacturer shall not be held responsible and the warranty shall no longer be valid in case of improper use.
5. **Unpack and inspect the shower base to check for possible damages.**
6. Place the shower base back in the carton until it is installed.
7. Before installing, check access to the final hydraulic connections.

Technical Support Assistance

If further assistance is required, please contact:

Product Support at 1.866.907.0122 (09:00 – 17:00hrs PST) or email technical@blubathworks.com

North America

Blu Bathworks Inc.

188 Smithe Street, Vancouver, BC, Canada, V6B 6A9

T +1.604.299.0122 F +1.604.299.0125

Please refer to blubathworks.com for warranty, terms & conditions under warranty & procedure for warranty service.

Preparing the location:



1. Make sure the floor and the supporting surfaces are flat and leveled.
2. Drill a hole that is wide enough to contain the appropriate drainage kit needed for the drainage system.
The hole must be appropriately located while keeping the position and size of the shower base in mind.



Preparing the shower base:

1. Remove the shower base from the packaging, which should be disposed of in accordance with the local recycling regulations. Install the drainage kit on the shower base as indicated by the Manufacturer. Fasten all the hydraulic connections of the drainage system. Open the faucets and let the water run inside the shower base. Check all the connections for possible leaks.
2. Place the shower base on the floor and make sure it is perfectly flat. Seal the entire perimeter of the shower base with acetic silicone. If the shower base is slightly above the floor, or semi-recessed, leave $\frac{1}{4}$ inch of space around the entire perimeter (which must be sealed with acetic silicone); as to make room for the thermal expansion of the material. Let the silicone dry for at least 24 hours before using the shower base (or before mounting any shower walls).


Cutting instructions for custom length fittings

1. Mark the shower base to indicate the position of the cut with a straight edge and a pencil according to the required length.
2. Cut through the cut-out line. A standard household skill saw or angle grinder needs to be upgraded with a diamond cutting blade. These are available at major home improvement centres. To avoid chipping the edge of the stone, which is caused by the blade's vibration, collars that act as big washers on both sides of the saw's blade reduce the vibration, allowing a cleaner cut. When stone is cut dry, a considerable amount of dust is generated. Some installers will use a handheld diamond-bladed radial saw with a vacuum attachment to help minimize the mess.
3. Place the shower base into position.
4. **Note:** Ensure the cut edge is installed against the wall to ensure the smooth edges are exposed.

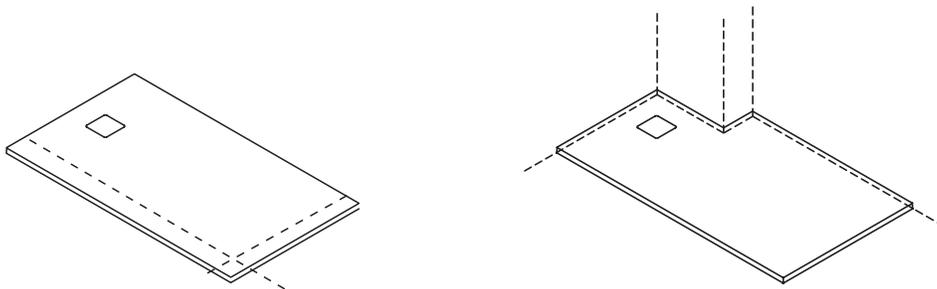

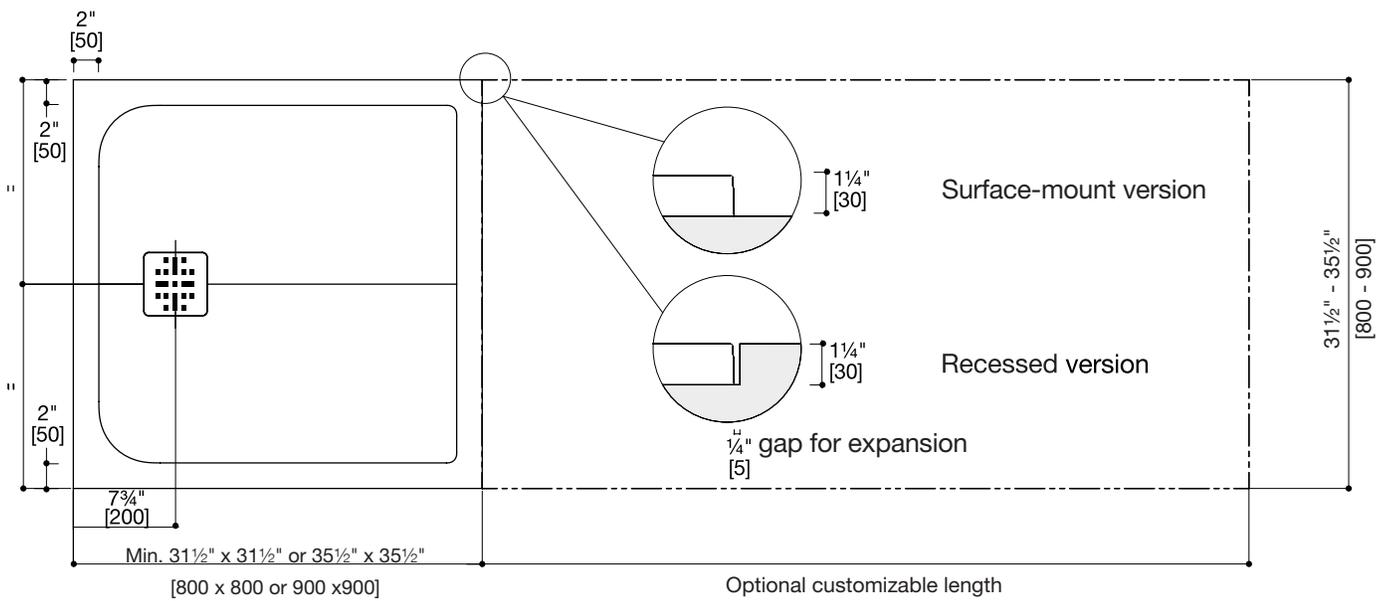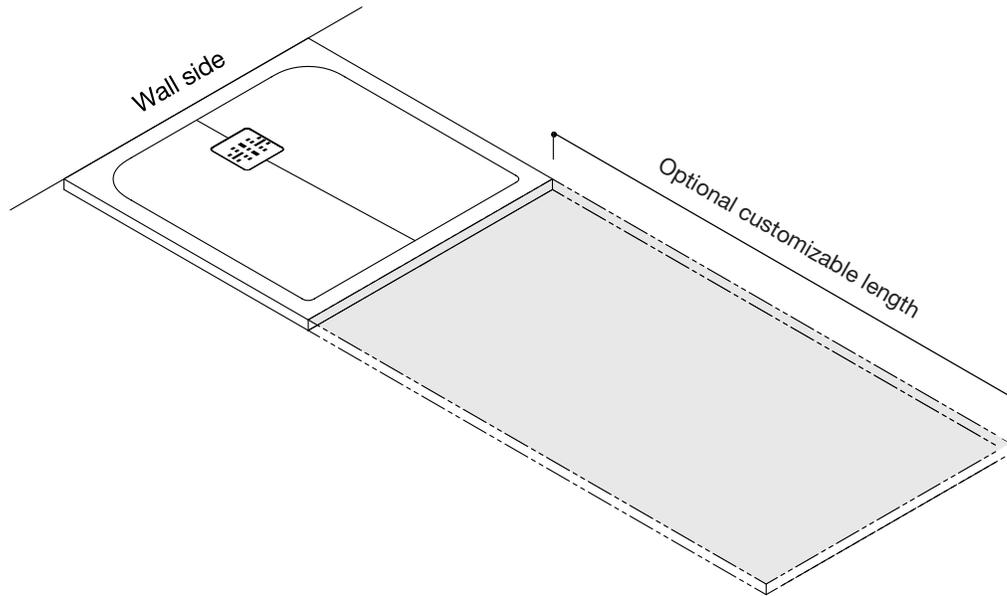

Recommended Tools

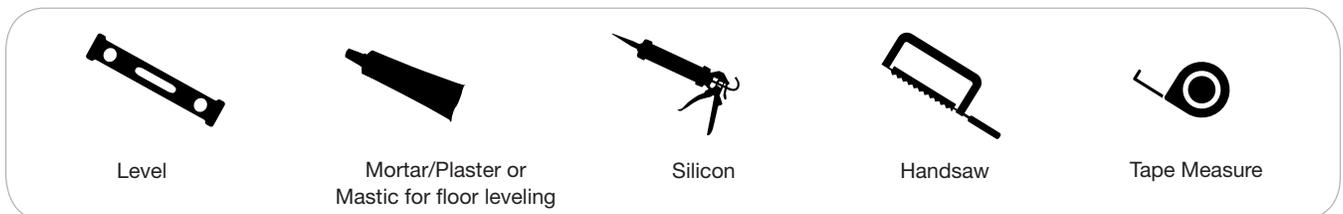

Level

Mortar/Plaster or
Mastic for floor leveling



Silicon

Handsaw


Tape Measure

Surface-mount Assembly R-L


1

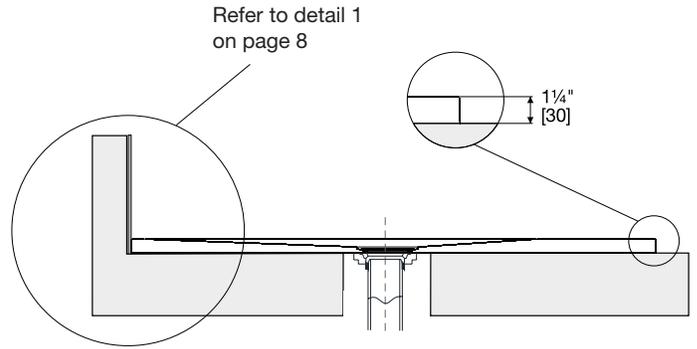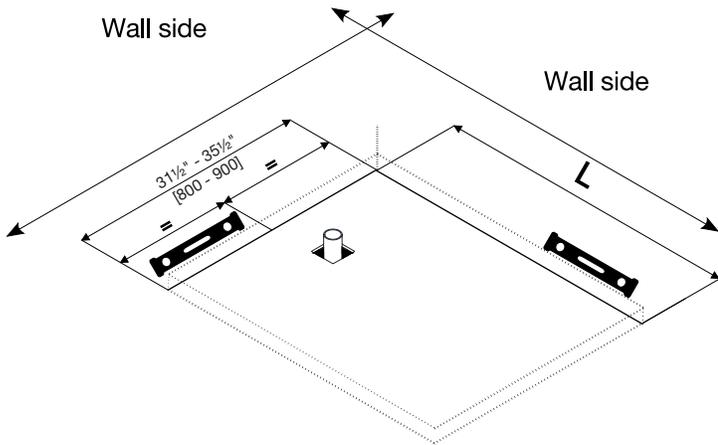

2

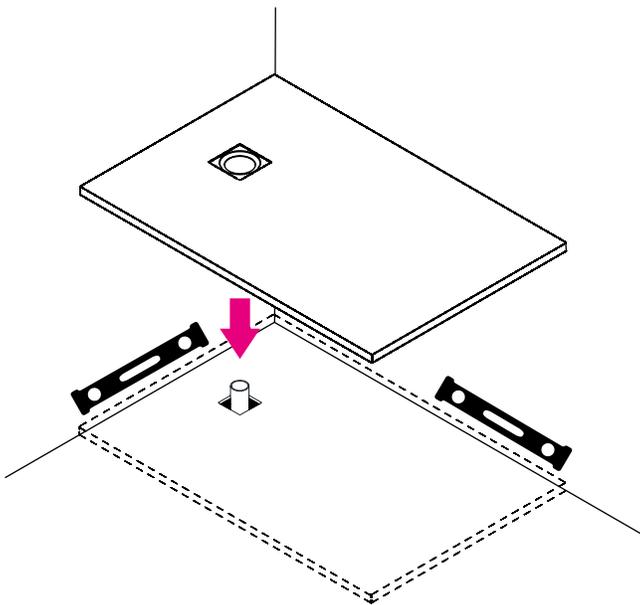


2A

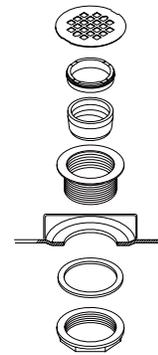


According to the drain installation manual by the drain manufacturer


(2" Drain not included)

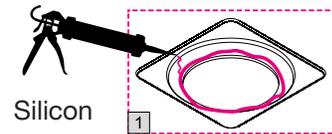


Silicon

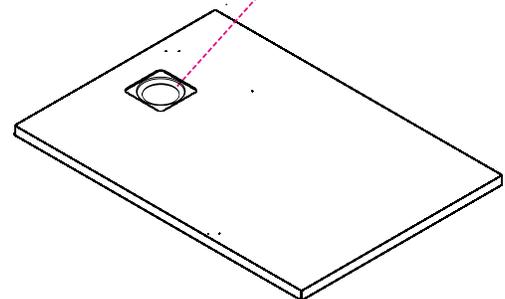


3

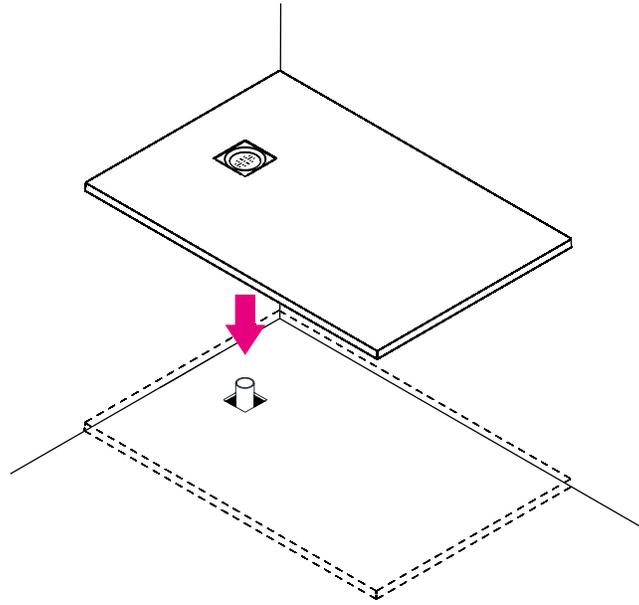


4

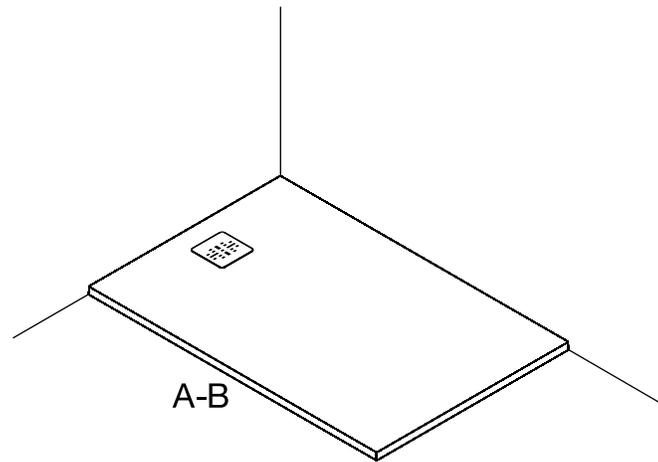

4A


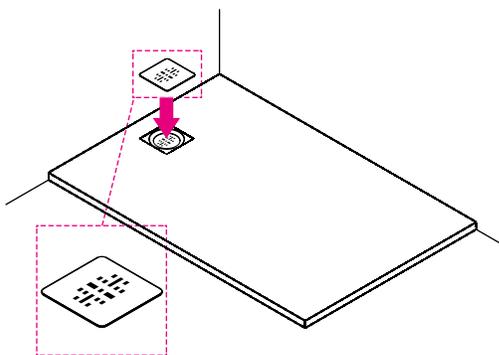


4B

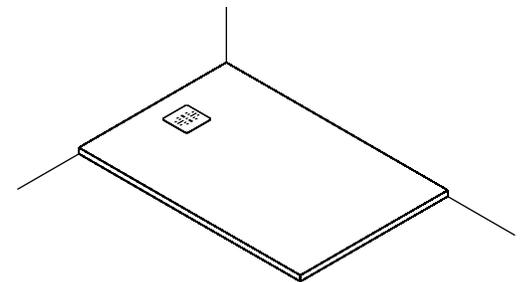


Recessed Assembly R-L


1

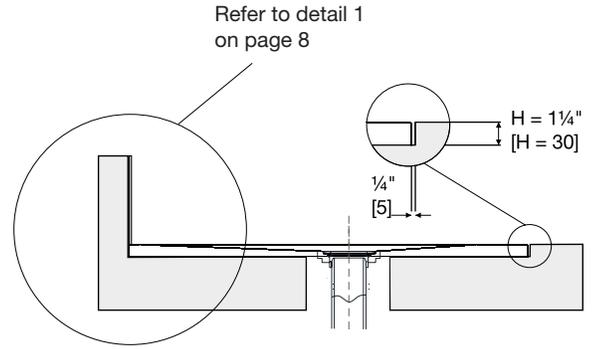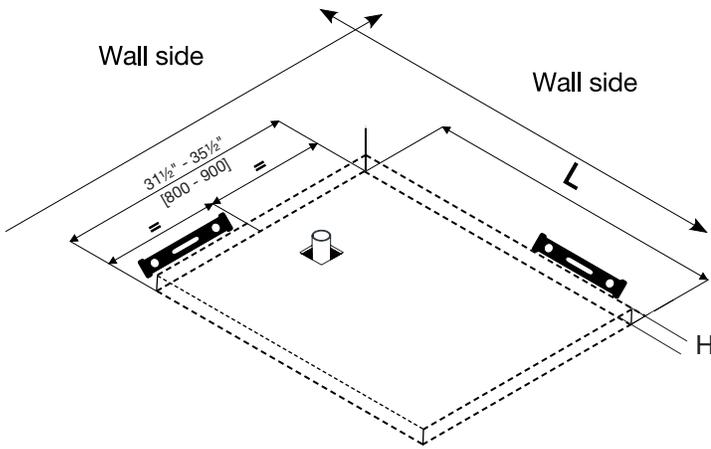

2


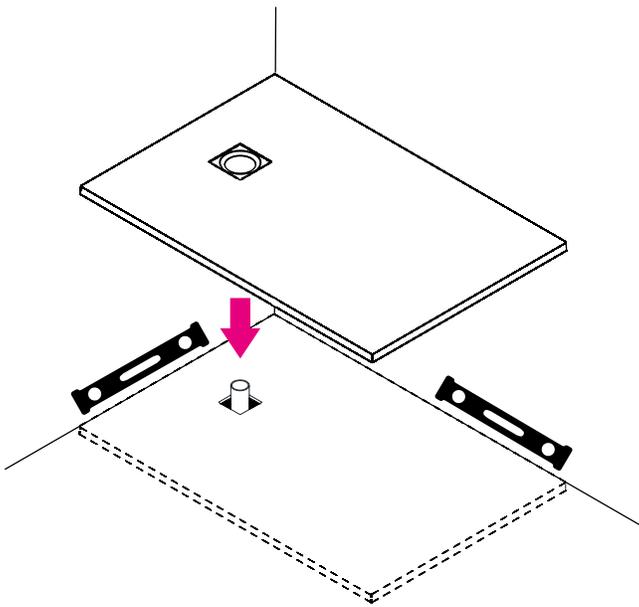



2A

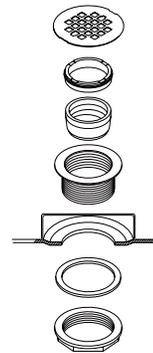


According to the drain installation manual by the drain manufacturer

(2" Drain not included)

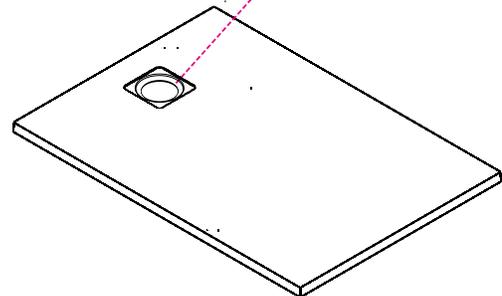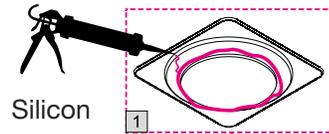


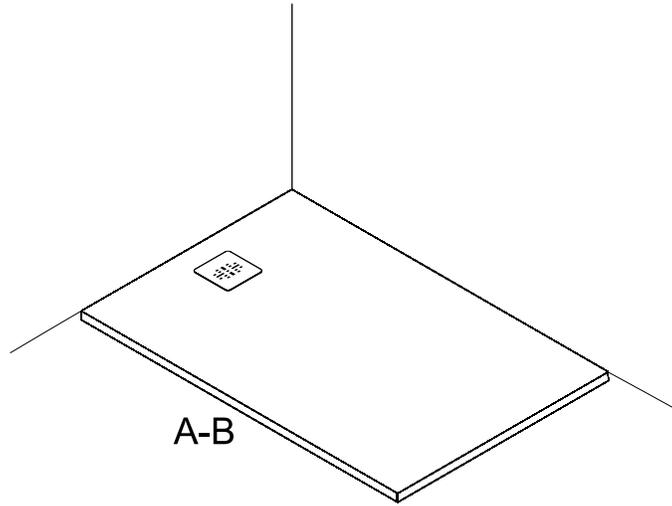

4A

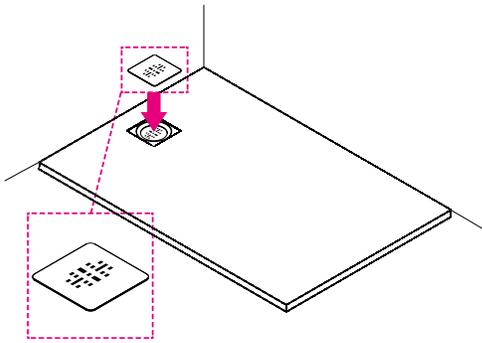

4B


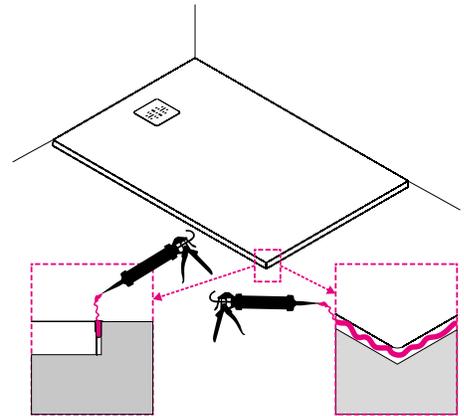


Alcove Installation using Tile Flange

In order to maintain the symmetry of these ultra-low shower base models in an alcove installation, the following points & illustration are provided below.

1. Determine wall finish material and its thickness
2. Install tile flange on corner edge of showerbase using high density silicone above and below lip of TF.BTSB tile flange as shown in Detail I (exploded)
3. Install shower base
4. Install wall finish
5. Apply a clear silicone bead where the shower base and wall finish meet at the flange location

**Blu Bathworks recommends TF.BTSB Tile Flange (Sold separately)

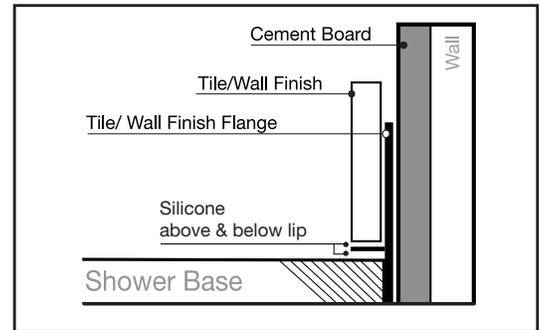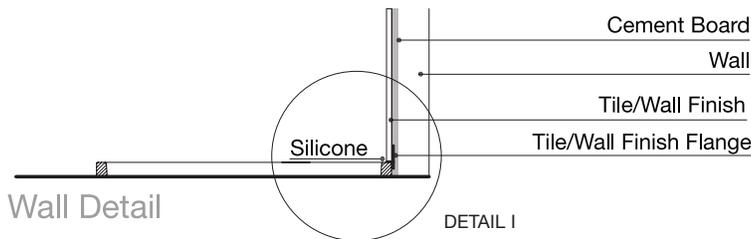

Instructions for use:

1. This shower base cannot be used autonomously by people with reduced motor skills, or with sensory and/or cognitive impairments (including children), or by anyone lacking the necessary know-how needed.
2. Make sure children are supervised by a person in charge of their safety when using this shower base.
3. This shower base was designed for domestic use, or similar, and it must only be installed and used at room temperature.
4. It is dangerous to use the shower base in the vicinity or while using electrical appliances (radios, hair dryers etc.).
5. Pay special attention when using the shower alone: standing under running hot water for a long time could cause nausea, dizziness and lack of consciousness.
6. We do not recommend using the shower after taking medicines or any substance that could cause drowsiness or that could affect blood pressure.
7. When the surface of the shower base is wet, the degree of slipperiness increases, especially if shampoos, soaps and oils are used. This shower base could be slippery during its use. For this reason, you may wish to place an adhesive non-slip on it or use a shower mat.

Do not clean using aggressive chemical agents, such as acetone, thinners, strong acids (muriatic acid etc.) or strong bases (caustic soda etc.), nor industrial detergents or paint solvents. For more information, please refer to the cleaning & repair guide in this document. Do not use metal scrapers, iron brushes or other domestic metal tools to remove stains, paints, plaster or other. Some substances, such as ink, cosmetics and dyes, can stain the material if they are in contact with the surface for too long; the same thing can happen with lit cigarettes.

We do not recommend using this product at water temperatures exceeding US / Canada maximum hot water temperature regulations of 150°F / 65°C, respectively. The Manufacturer shall not be liable for any damages that may result from the improper use of the product.

blu·stone™ cleaning & repair guide

blu·stone™ is Blu Bathworks' signature eco-friendly stone collection; a durable, low maintenance and hygienic material that is high pressure injection molded, non-porous and anti-microbial. blu·stone™ products are stain, scratch and impact resistant, and easy to clean: after each use, simply wipe with a soft cloth to remove any surface dirt.

routine care

- Never expose blu·stone™ to petroleum based products, such as paint removers, oven cleaners or other solvents
(**Note:** personal hygiene products and cosmetics will NOT damage the surface)
- We recommend that stains are removed within 24 hours
- Do not directly cut on the blu·stone™ surface
- Blu Bathworks does not recommend exceeding US/ Canada maximum hot water temperature regulations of 150°F/65°C, respectively. Exceeding stated temperatures could result in damage to blu·stone™ products

standard cleaning

For standard cleaning of both gloss and matte finishes, we recommend using widely available cleaning products such as Mr. Clean, Fantastik, VIM, CIF etc. Matte finished products may occasionally require a mildly abrasive product.

blu·stone™ matte finish:

- For more difficult stains, use a mildly abrasive cream cleanser such as Soft Scrub, Comet Soft Cleanser, CIF or VIM

blu·stone™ gloss finish:

- Do not use abrasive products or cream cleansers

scratched or damaged surfaces

blu·stone™ matte finish:

- Ensure there is no surface dirt by flushing with water
- Rub the 600-grit sanding block, provided, in a gentle circular motion
- Higher grit sandpaper may be required to blend the repaired area to match the existing product finish

blu·stone™ gloss finish:

- Ensure there is no surface dirt by flushing with water
- We recommend sanding the area starting with 600, 800 and 1200-grit sandpaper: begin with the lower number (coarser) grit followed with each higher number (finer) in ascending order
- Finish by polishing the surface using a cloth and white polishing compound for automobiles

repairs

For more extensive repairs, send a photograph of your blu·stone™ product to Blu Customer Service (technical@blubathworks.com), who will inform you as to the most appropriate methods to use.

limited warranty

Blu Bathworks' ("Blu") warranty on blu·stone™ products covers all defects in materials and manufacturing for a period of five (5) years from the date of purchase. This limited warranty, starting on the original purchase date, is only offered to the original purchaser who acquires the product directly from Blu or from its authorized dealers. This limited warranty does not apply to cases in which a product was incorrectly installed, nor to damage due to negligence, misuse, thermal shocks, cigarettes, flames, natural catastrophes or other accidents. Blu is not responsible for costs and claims that may arise from purchase of a product unsuited to the structure of the existing building. Any transformation or alteration made to a Blu product automatically voids the warranty.

Blu's warranty is limited to repair or replacement (with a product of equal value), provided the claim is made to an authorized dealer or directly to Blu, within the warranty period. Labor costs and any other expenses entailed by replacement of a Blu product